
09 Template

09-TEMPLATE - rev A - 2026-10-17 - ENGINEERING RELEASE

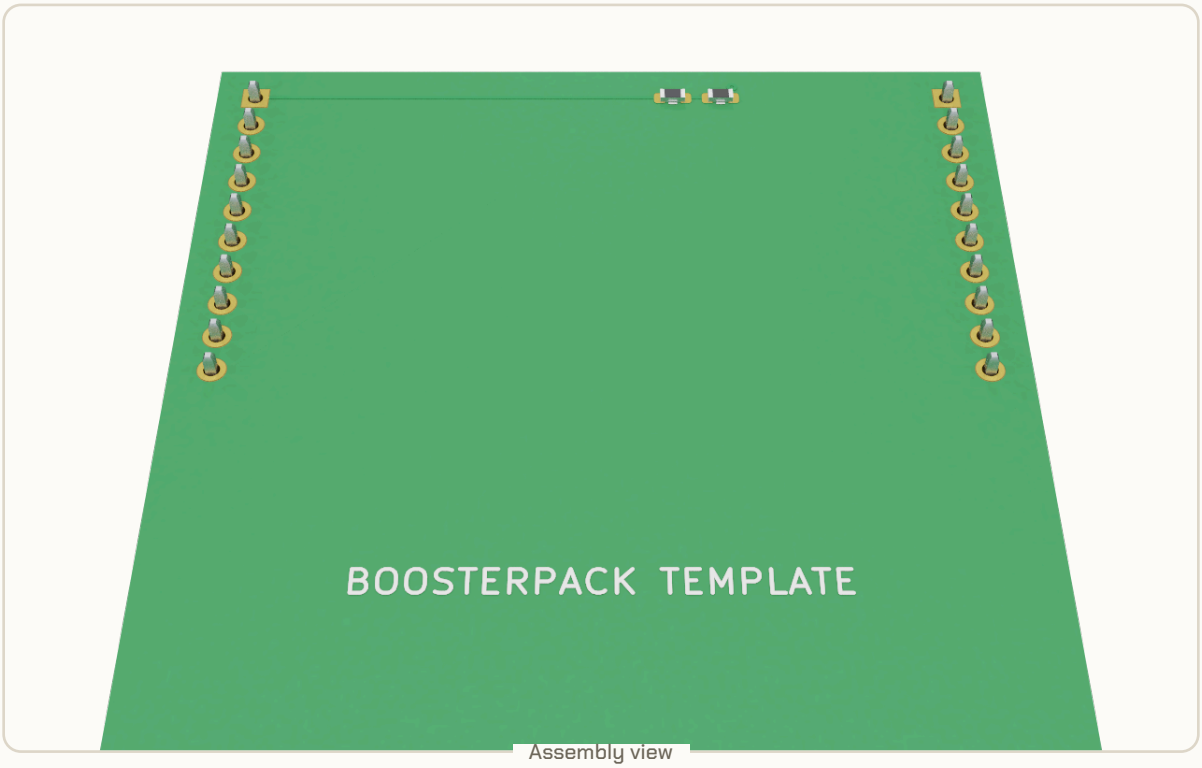

Assembly view

Key specifications

Interfaces	left / right
Outline	50.80 x 50.80 mm
PCB	2 copper layers, 1.60 mm finished thickness
Fitted parts	4

Operating window

3V3 supply voltage	**3.3 V**
V33 supply voltage	**3.299 to 3.301 V**
Ambient operating temperature	**0 to 70 °C**

See Electrical limits for the conditions behind these values, required external loads and contact limits.

Connector overview

CONNECTOR	USE	SIGNALS
J1	left	V33
J2	right	GNDN

Electrical limits

Operating conditions and limits for the assembled board

Recommended operating conditions

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
3V3 supply voltage	3V3	Required input supply voltage	3.3	—	3.3	V
V33 supply voltage	V33	Supply and component tolerances	3.299	—	3.301	V
Ambient operating temperature	TA	Ambient operating range	0	—	70	°C

Electrical characteristics

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
V33 supply current	I33	[1, 2, 3]	0	—	0.3385	mA
Power consumption	P	[4]	—	—	1.118	mW

Interface constraints

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
J1 current per contact	I(J1)	Pin 1 [5]	—	—	1	mA
J2 current per contact	I(J2)	Pin 1 [5]	—	—	1	mA

How to use these limits

[1] Maximum instantaneous current in the modeled window, drawn by the board itself.

[2] **Contacts:** What an attachment draws through a connector contact adds to this, up to that contact's limit.

[3] **Tolerances:** Calculated across the listed supply ranges and modeled component tolerances.

[4] Worst-case input power the board itself draws across all supply rails.

[5] **Contact current:** Each listed pin must not exceed this current. These are application design limits, not connector ratings or available output current.


Use only the conditions printed with each value. Component absolute maximum ratings do not automatically apply to the assembled board.

Schematic


IC and IC 09-TEMPLATE

KEY RAIL IN OUT BIDIR PASSIVE 5·p2 BLOCK 5, PAGE 2

1 IC



2 IC




UNUSED PINS NOT SHOWN

Board layout

Copper on both layers, and the board area that no part or track uses

KEY — TOP COPPER — BOTTOM COPPER ▭ PAD ○ VIA

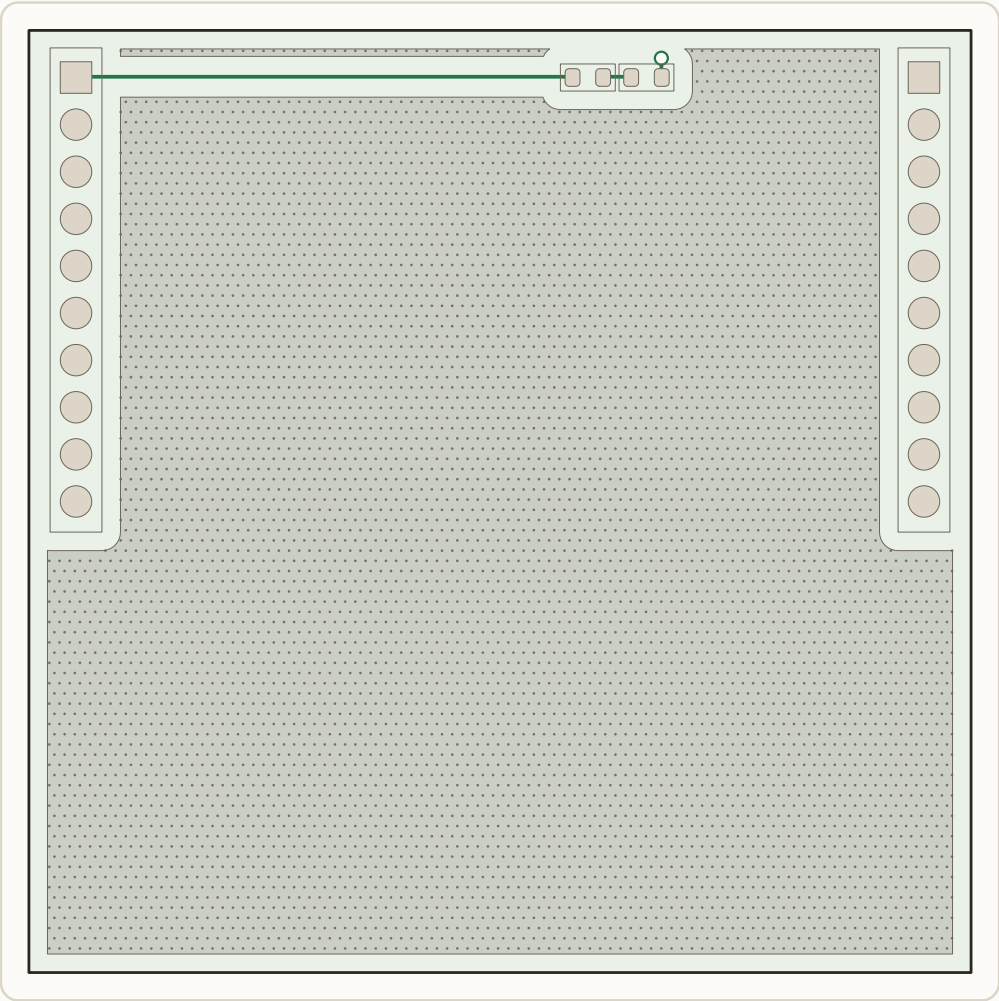

TOP VIEW · BOTTOM COPPER SEEN THROUGH · 51 X 51 MM · LARGE PARTS NAMED

Unused area


PATTERN	CAUSE	BOUNDED BY	AREA	OF BOARD
▭	**Edge margin**	between parts and the outline	**2093.0 mm²**	**81.1 %**
	Total	at least 1 mm from everything	**2093.0 mm²**	**81.1 %**

Unused area is board surface at least 1 mm from every part, track and the board edge. A part gap is the only kind a tighter placement can reclaim.

Ground plane

Ground on B.Cu under the routes on F.Cu

KEY GROUND PLANE OPENING ROUTE ON F.CU

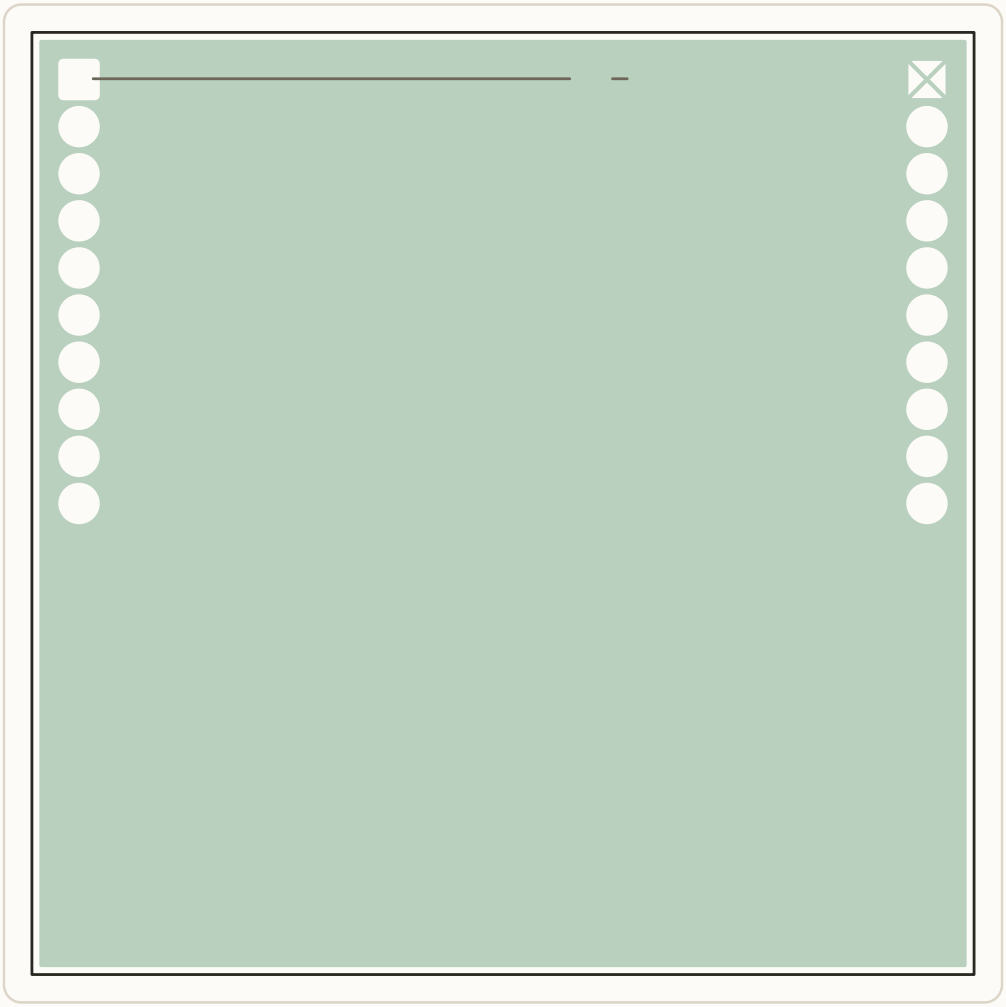

TOP VIEW · B.CU UNDER F.CU


Return path

Ground plane	B.Cu, 94 % of the board
Routes on F.Cu	26 mm; no return detour of 1 mm or more

Openings in the plane add under 1 mm to the return path of a route on F.Cu above them; no route on F.Cu crosses a gap that adds more.

Board connections

Connector and test point locations viewed from the top of the assembled board

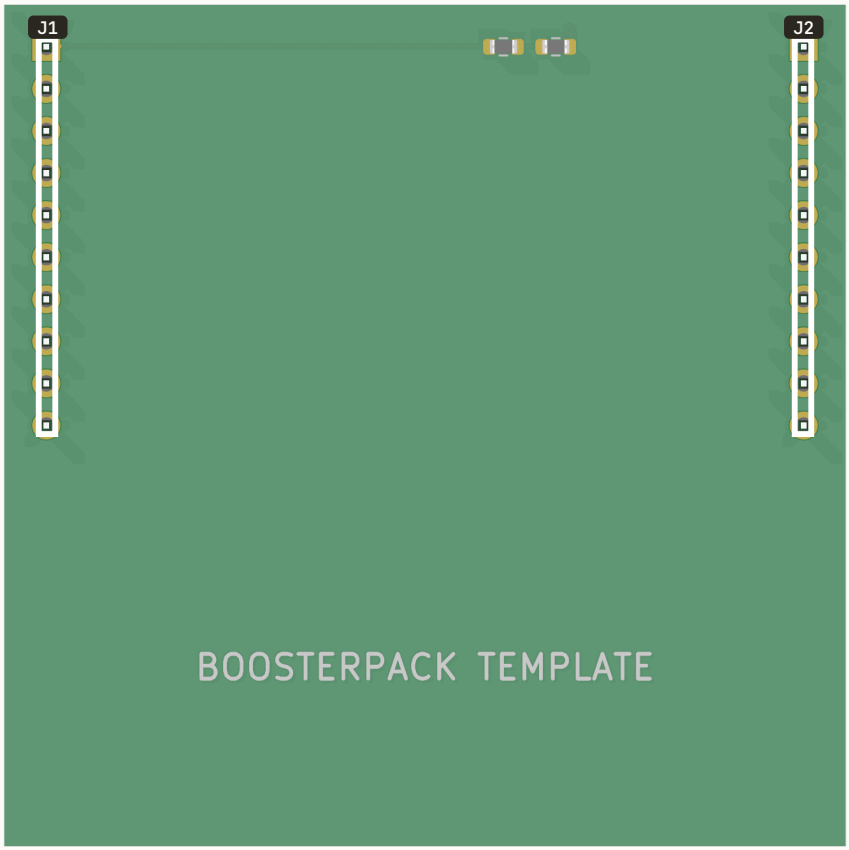

TOP VIEW - CONNECTORS AND TEST POINTS MARKED - NOT TO SCALE

Pin schedules and mating-face views are on the following pages.

Connector pinout

Pin numbers are shown as viewed into the mating face

SIGNAL CLASS SIGNAL NO CONNECT GROUND

J1 - left



BOTTOM MATING FACE VIEW

PIN	SIGNAL	DESCRIPTION
1	V33	V33 signal
2	NC	No connection on the released board
3	NC	No connection on the released board
4	NC	No connection on the released board
5	NC	No connection on the released board
6	NC	No connection on the released board
7	NC	No connection on the released board
8	NC	No connection on the released board
9	NC	No connection on the released board
10	NC	No connection on the released board

J2 - right



BOTTOM MATING FACE VIEW

PIN	SIGNAL	DESCRIPTION
1	GNDN	Ground reference
2	NC	No connection on the released board
3	NC	No connection on the released board
4	NC	No connection on the released board
5	NC	No connection on the released board
6	NC	No connection on the released board
7	NC	No connection on the released board
8	NC	No connection on the released board
9	NC	No connection on the released board
10	NC	No connection on the released board

Components on this board

Component identities and supplier codes

IDENTIFICATION VIEWS ARE NOT TO SCALE



C492409
left
J1 · QTY 1 · LCSC C492409



C492409
right
J2 · QTY 1 · LCSC C492409


Passives


REFERENCE	VALUE / ROLE	QTY	PART
R1, R2	10k	2	C844918

Manufacturability


The smallest feature this board asks a fab to make, rule by rule

KEY — TOP COPPER — BOTTOM COPPER — PAD — MASK OPENING

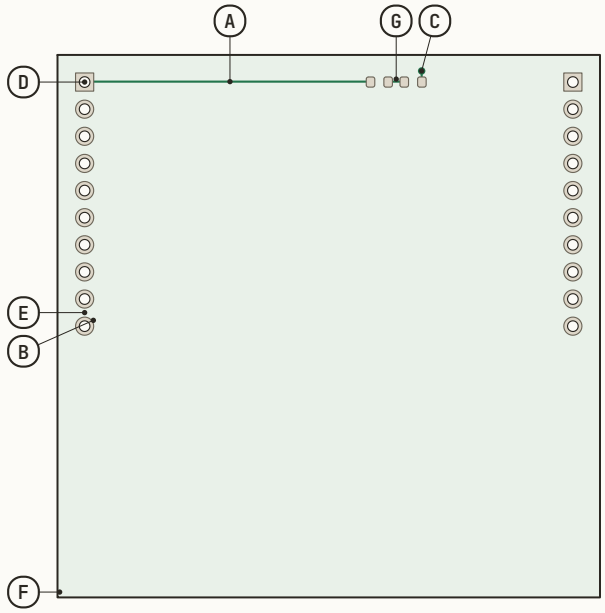


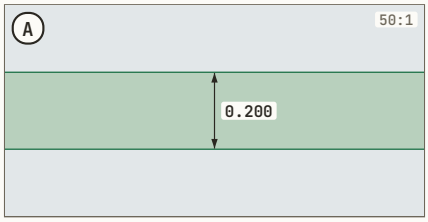


TRACK WIDTH
All 3 track segments
Required minimum 0.200; at minimum

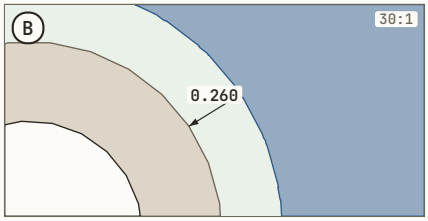


COPPER TO COPPER, OUTER
Every outer gap between nets
Required minimum 0.1524; 0.108 above

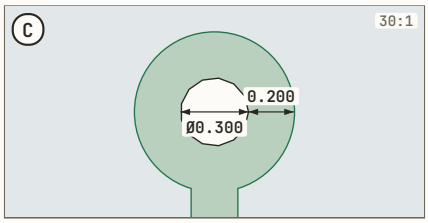


FINISHED DRILL · VIA RING
All 21 holes; the one via
Finished drill minimum 0.300; at minimum.
Via ring minimum 0.200; at minimum

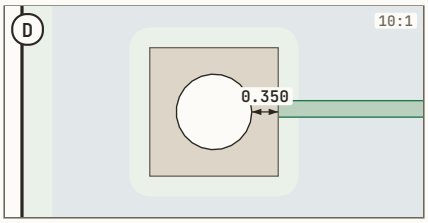


PTH RING
All 20 plated leads
Required minimum 0.300; 0.050 above

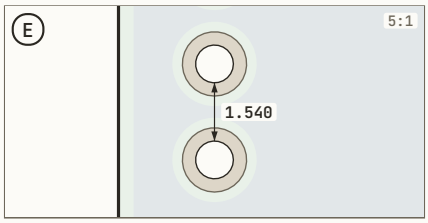

HOLE TO HOLE
All 21 holes, wall to wall
Required minimum 0.300; 1.240 above

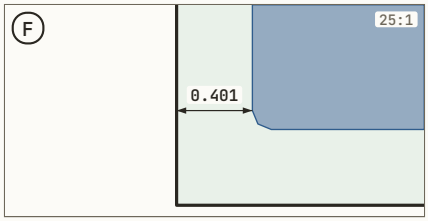

COPPER TO EDGE
All copper, pours included
Required minimum 0.381; 0.020 above

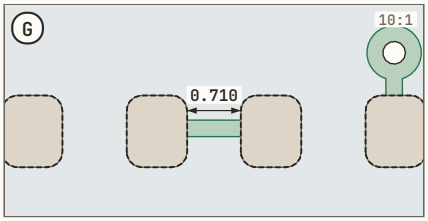

MASK WEB
All 24 top mask openings
Required minimum 0.1016; 0.608 above


COMPATIBLE FABS

JLCPCB [1] · PCBWay [2] · OSH Park [3] · AISLER [4]


Detail minima use the strictest checked profile. Compatibility means the checked dimensional rules pass.

LAYERS	THICKNESS	ASPECT RATIO	HOLES	DRILL SIZES
2	1.6 mm	5.3 : 1	1 via, 20 PTH	2, Ø0.300–1.000


All values in mm. [1] read 2026-08-08 [2] read 2026-08-08 [3] read 2026-08-13 [4] read 2026-08-08

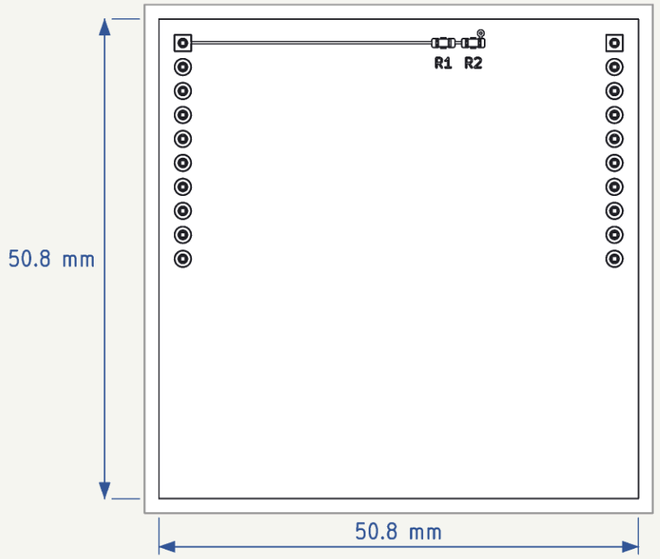


TOP VIEW

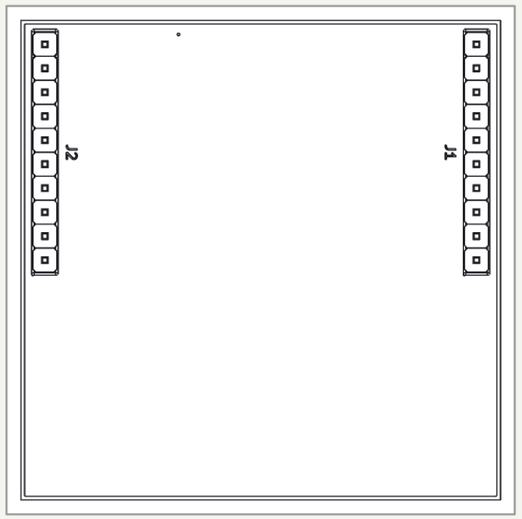


BOTTOM VIEW




FRONT VIEW (Y)



LEFT VIEW (X)



RIGHT VIEW (X)

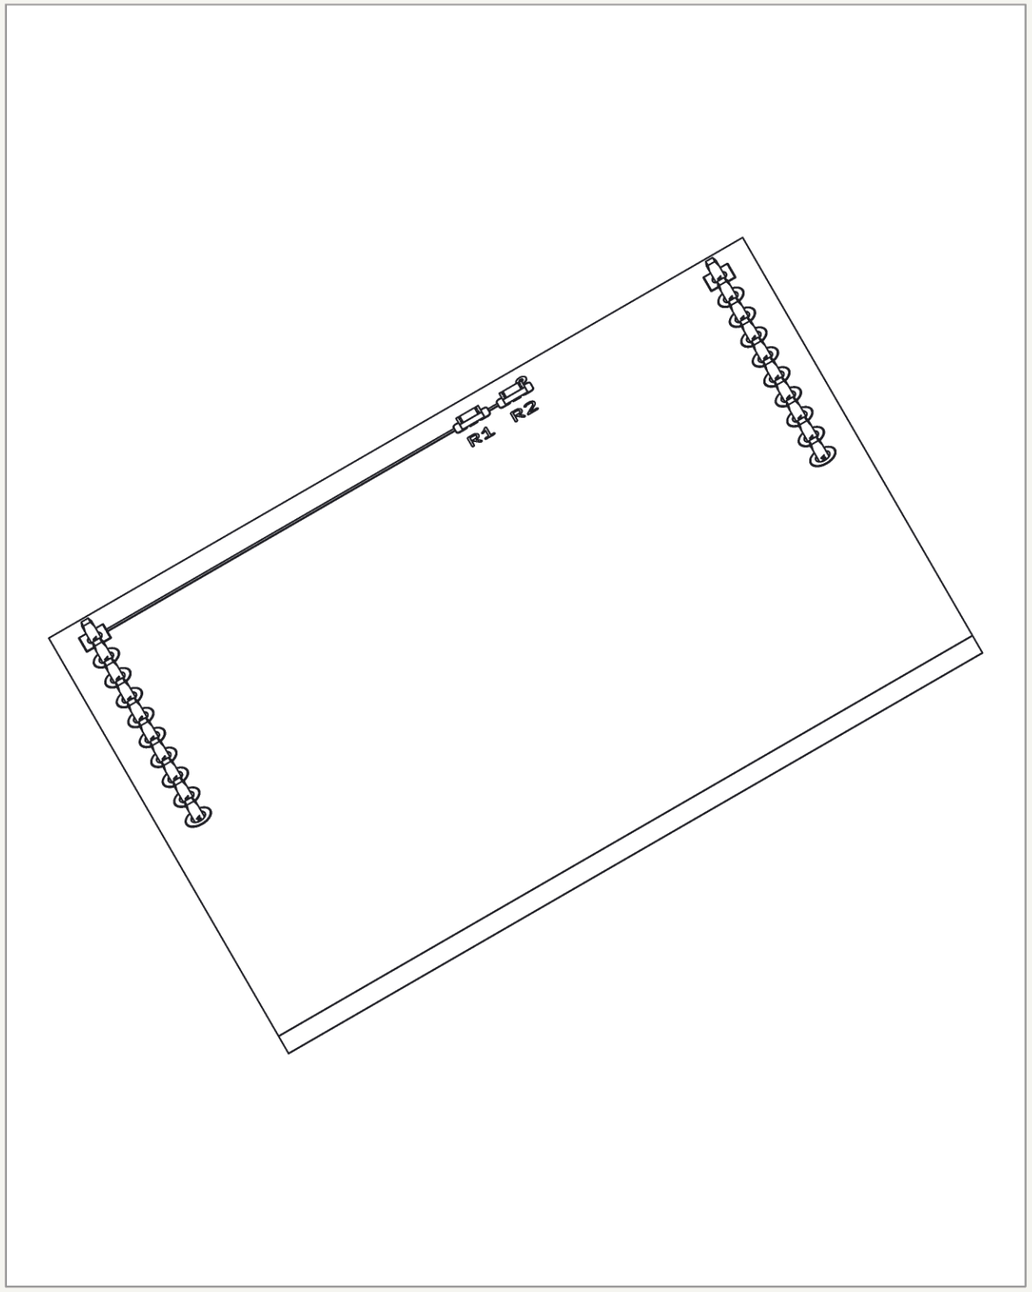

ISOMETRIC – NTS

TITLE 09 Template assembly	DWG NO. 09–TEMPLATE
REV A	DATE 2026–10–17
OVERALL 50.8 x 50.8 x 11.5 mm	MATERIAL FR–4, 1.60 mm
PROJECTION REFERENCE VIEWS	SCALE NTS
UNITS mm	SHEET 1 OF 1